

START Extra A66B2W0_1 60 Ah

According to EN 50342


Electrical specification

Voltage:	12V
Capacity C ²⁰ :	60 Ah
Cold cranking current:	540 A [EN]
Cold cranking current:	335 A [DIN]

Mechanical specification

Dimensional group:	LB2
ETN reference:	560 077 054 SMF
DIN reference:	56077
Dimensions ^A in mm (LxWxH):	242x175x175
Cell Layout:	0
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B4
	Colour	Black

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	Black

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Black

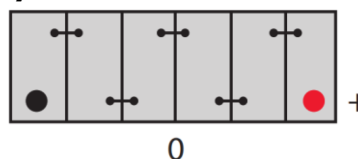

Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	Black

Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level
W3	C2	V1	E1

Weight^B

Battery weight in kg:	9.50
Acid weight in kg:	4.60
Total battery weight in kg:	14.10

Layout

Hold-down

Separator

Type	PE
------	-----------

^{A.} Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

^{B.} Weight may vary ±5%.