

EC34CX3_1 230 Ah

According to EN 50342



SHD series

HEAVY-DUTY VEHICLES

Electrical specification

Voltage:	12V
Capacity C²⁰:	230 Ah
Cold cranking current:	1250 A [EN]
Cold cranking current:	740 A [DIN]

Mechanical specification

Dimensional group:	C
ETN reference:	730 011 125
DIN reference:	73011
Dimensions^A in mm (LxWxH):	514x276x242
Cell Layout:	3
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B0
	Colour	Black

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	Black

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Black

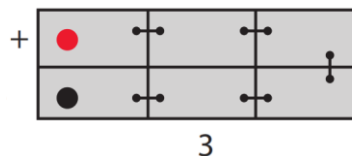
Handles	Material	Polypropylene
	Position	Sides - on container
	Colour	Black

Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level
W4	C2	V2	E2

Weight^B

Battery weight in kg:	36.80
Acid weight in kg:	19.00
Total battery weight in kg:	55.80

Layout

Hold-down

Separator

Type	PE with Glass Mat
-------------	--------------------------

- A.** Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
- B.** Weight may vary $\pm 5\%$.