

MONBAT EFB Start-Stop N66L2X0_1 60 Ah

According to EN 50342


**EFB
Start Stop**

SEALED MAINTENANCE FREE


Electrical specification

Voltage:	12V
Capacity C ²⁰ :	60 Ah
Cold cranking current:	600 A [EN]
Cold cranking current:	340 A [DIN]

Mechanical specification

Dimensional group:	L2
ETN reference:	560 002 060
DIN reference:	56002
Dimensions ^A in mm (LxWxH):	242x175x190
Cell Layout:	0
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B13
	Colour	Black

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	GREY

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Black

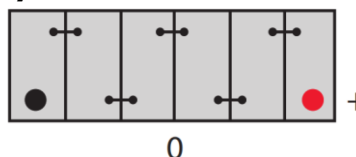

Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	GREY

Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level	Micro-cycle performance
W4	C2	V2	E2	M2

Weight^B

Battery weight in kg:	11.95
Acid weight in kg:	4.60
Total battery weight in kg:	16.55

Layout

Hold-down

Separator

Type	PE
------	-----------

^{A.} Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

^{B.} Weight may vary ±5%.