

MONBAT EFB Start-Stop N77L3X0_1 70 Ah

According to EN 50342



EFB Start Stop

SEALED MAINTENANCE FREE



Electrical specification

Voltage:	12V
Capacity C ²⁰ :	70 Ah
Cold cranking current:	700 A [EN]
Cold cranking current:	420 A [DIN]

Mechanical specification

Dimensional group:	L3
ETN reference:	570 002 070
DIN reference:	57002
Dimensions ^A in mm (LxWxH):	278x175x190
Cell Layout:	0
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B13
	Colour	Black

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	GREY

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Black

Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	GREY


Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level	Micro-cycle performance
W4	C2	V2	E2	M2

Weight^B

Battery weight in kg:	13.90
Acid weight in kg:	5.30
Total battery weight in kg:	19.20

Layout

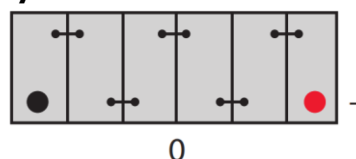

Hold-down



- ^{A.} Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
- ^{B.} Weight may vary ±5%.