

MONBAT AGM Start-Stop GM67L2K3_1 60 Ah

According to EN 50342


**AGM
Start Stop**

SEALED MAINTENANCE FREE


Electrical specification

Voltage:	12V
Capacity C ²⁰ :	60 Ah
Cold cranking current:	640 A [EN]
Cold cranking current:	395 A [DIN]

Mechanical specification

Dimensional group:	L2
ETN reference:	560 901 064
DIN reference:	56001
Dimensions ^A in mm (LxWxH):	242x175x190
Cell Layout:	0
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B13
	Colour	Black

Lid	Material	Polypropylene
	Cover design	KAMINA
	Colour	Black

Vent caps	Material	Polypropylene
	Type	KAMINA
	Colour	Black

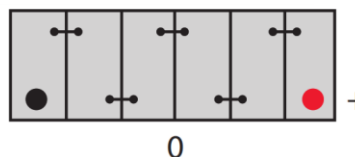
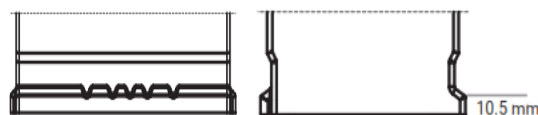
Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	Black

Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level	Micro-cycle performance
W5	C2	V3	E3	M3

Weight^B

Battery weight in kg:	14.70
Acid weight in kg:	3.45
Total battery weight in kg:	18.15

Layout

Hold-down

Separator

Type	AGM
------	-----

^{A.} Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

^{B.} Weight may vary ±5%.