

MONBAT Premium SMF A167B2X0_1 63 Ah

According to EN 50342



Premium

SEALED MAINTENANCE FREE



Electrical specification

Voltage:	12V
Capacity C ²⁰ :	63 Ah
Cold cranking current:	600 A [EN]
Cold cranking current:	360 A [DIN]

Mechanical specification

Dimensional group:	LB2
ETN reference:	563 078 060 SMF
DIN reference:	56378
Dimensions ^A in mm (LxWxH):	242x175x175
Cell Layout:	0
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B14
	Colour	Grey

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	Grey

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Grey

Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	Grey


Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level
W4	C2	V2	E2


Weight^B

Battery weight in kg:	10.50
Acid weight in kg:	4.40
Total battery weight in kg:	14.90

Layout

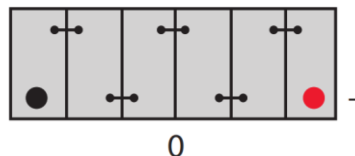

Hold-down

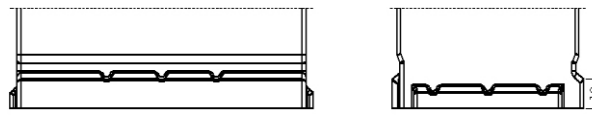

Separator

Type	PE
------	----

A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

B. Weight may vary ±5%.