



DEEP CYCLE

PROFESSIONAL

PHYSICAL CHARACTERISTICS

	SI Units	US Units
Length	261 mm	10,28 inch
Width	181 mm	7,13 inch
Height	276 mm	10,87 inch
Typical weight	30,50 kg	67,24 lbs

6V US DC-225 Ah (C₂₀)



Specifications:

- Nominal voltage: 6 V
- Rated capacity: 225 Ah (at C₂₀ and 25 °C)
- Plate technology: Antimony / Antimony
- Separator: Polyethylene + glass mat
- Electrolyte: Sulphuric acid (SG 1,28) OCV 6.35V
- Standards: IEC 60254; IEC 61427
- Case / Lid material: Polypropylene
- Lid type: Flat
- Terminal type: Dual
- Carrying Handles: Available
- Cycles at 50% DoD: up to 900 cycles
- PVES applications: up to 2000 cycles

Performance characteristics:

BATTERY DISCHARGE PERFORMANCE AT 25°C

Discharge rate	C ₅ (5 h)	C ₂₀ (20 h)	C ₁₀₀ (100 h)	Capacity at 25 A
End of discharge voltage	5,10 V	5,25 V	5,40 V	5,25 V
Discharge capacity	185 Ah	225 Ah	250 Ah	470 min

Temperature correction factor of discharge C₅ (5 h) capacity


Temperature	-10 °C	0 °C	20 °C	25 °C	30 °C	35 °C	40 °C
Correction factor	0.80	0.88	0.98	1.00	1.03	1.05	1.07

BATTERY CHARGE CONDITIONS AT 25°C

Charging profile:


Charge factor: 1.10 – 1.20

IULa –characteristics for flooded batteries

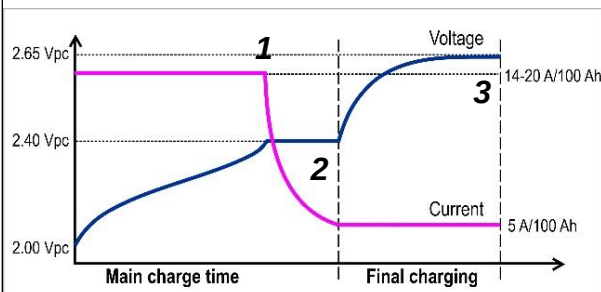

Stage1: Constant current Stage 2: Constant voltage Stage 3: Constant current


Charging times with IULa-characteristics in hours at 25 °C

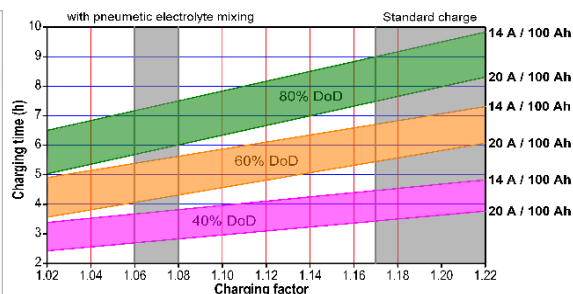


It is mandatory to check the electrolyte level every 3 months and top up with deionized water to the markings.

BATTERY DISCHARGE CURVES AT 25°C

DISCHARGE PERFORMANCE AT CONSTANT CURRENT DISCHARGE (A)

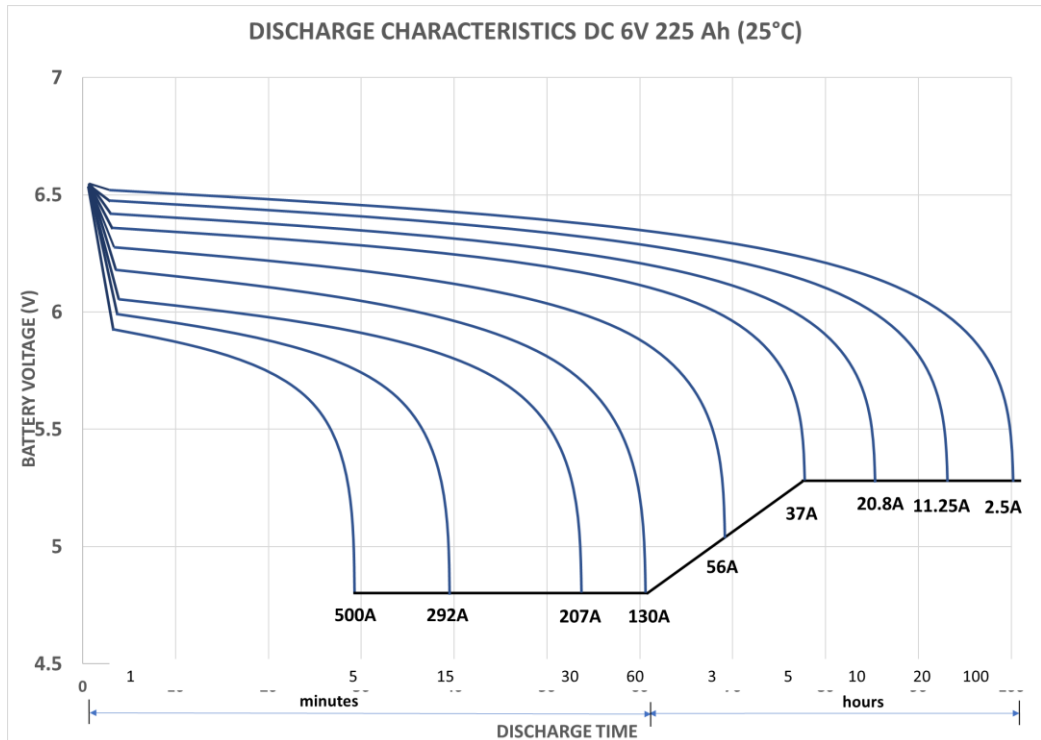

Cycle service life in relation to depth of discharge (DC 6/8V)

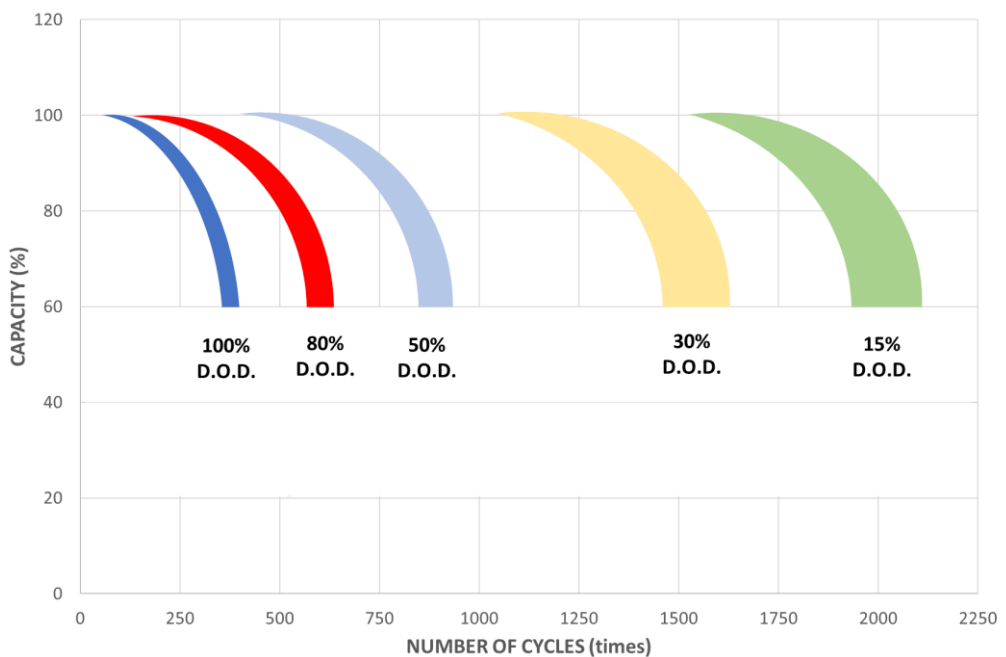

It is mandatory to check the electrolyte level every 3 months and top up with deionized water to the markings.