



Series	4000	Warranty	3 Years
Volts	12	Design	Grp 24
Cells	6		
Terminal Type	DT		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18		

### Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Recommended Charge Current	10 A
Maximum Charge Current	20 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

### Capacity

Cold Crank Amps (CCA) 0°F / -18°C		550			
Marine Crank Amps (MCA) 32°F / 0°C		690			
Reserve Capacity (RC @ 25A)		150 Minutes			
Reserve Capacity (RC @ 75A)		43 Minutes			
Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)	
	105%	100%	75%	50%	

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	106 AH	1.06 A
@ 20 Hour Rate	85 AH	4.25 A
@ 15 Hour Rate	80 AH	5.33 A
@ 10 Hour Rate	72 AH	7.23 A
@ 8 Hour Rate	71 AH	8.82 A
@ 5 Hour Rate	69 AH	13.8 A
@ 1 Hour Rate	31 AH	30.6 A

Ampere hour capacity ratings based on specific gravity of 1.280 at 27°C (80°F). Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

### Specifications

Weight	21.5 kg	47.5 lbs
Length	279 mm	11"
Width	171 mm	6.75"
Height Incl. Term.	238 mm	9.38"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.


Container	ABS
Cover	ABS
Handles	Plastic Strap

- Plastics are UL94 HB (UL94-V2 available)
- Plastics are impact copolymer rated to ASTM D256, D5420
- Vented design with integral flame arrestor vent caps

### Voltage vs. Depth of Discharge

DISCHARGE	0%	25%	50%	75%	100%
20 HR AH RATE	2.10 V	2.07 V	2.00 V	1.92 V	1.75 V
10 HR AH RATE	2.10 V	2.06 V	1.98 V	1.89 V	1.75 V
3 HR AH RATE	2.10 V	2.03 V	1.95 V	1.86 V	1.75 V
1 HR AH RATE	2.10 V	2.01 V	1.93 V	1.84 V	1.75 V

### Detailed Illustration

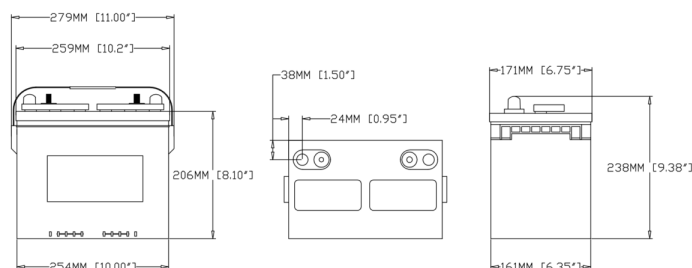

Designed in compliance with applicable BCI, DIN, BS & IEC standards.  
Tested in compliance to BCI & IEC standards.



intertek  
0122624

Rev.#2 | August 2024