

FLOODED DEEP CYCLE BATTERY

8 CS 27P



Series	5000	Warranty	See Warranty Terms
Volts	8	Design	SPEC
Cells	4	Plates/Cell	27
Terminal Type	Flag RR		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18		

Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

Capacity

Cold Crank Amps (CCA) 0°F / -18°C		2264			
Marine Crank Amps (MCA) 32°F / 0°C		2830			
Reserve Capacity (RC @ 25A)		2229 Minutes			
Reserve Capacity (RC @ 75A)		743 Minutes			
Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)	
	105%	100%	75%	50%	

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	1198 AH	11.98 A
@ 72 Hour Rate	1133 AH	15.74 A
@ 50 Hour Rate	1073 AH	21.45 A
@ 20 Hour Rate	929 AH	46.44 A
@ 15 Hour Rate	864 AH	57.58 A
@ 10 Hour Rate	827 AH	82.66 A
@ 8 Hour Rate	799 AH	99.84 A
@ 5 Hour Rate	743 AH	148.60 A
@ 1 Hour Rate	418 AH	417.92 A

Ampere hour capacity ratings based on specific gravity of 1.280 at 27°C (80°F). Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

Specifications


Weight	207 kg	456 lbs
Length	718 mm	28.25"
Width	286 mm	11.25"
Height Incl. Term.	464 mm	18.25"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Electrolyte Reserve	95 mm	3.75"
Container (Inner)	Polypropylene	
Cover (Inner)	Polypropylene - heat sealed to inner container	
Container (Outer)	High Density Polyethylene	
Cover (Outer)	High Density Polyethylene snap fit to outer container	
Handles	Molded	

- Plastics are UL94 HB (UL94-V2 available)
- Plastics are impact copolymer rated to ASTM D256, D5420
- Vented design with integral flame arrestor vent caps


Cycle Life vs. Depth of Discharge

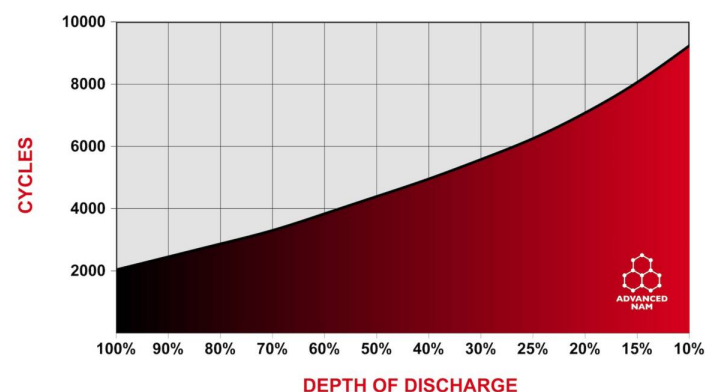

Voltage vs. Depth of Discharge

DISCHARGE	0%	25%	50%	75%	100%
20 HR AH RATE	2.10 V	2.05 V	2.02 V	1.96 V	1.75 V
6 HR AH RATE	2.10 V	2.04 V	2.00 V	1.95 V	1.75 V
1 HR AH RATE	2.10 V	2.03 V	1.99 V	1.94 V	1.75 V

Detailed Illustration

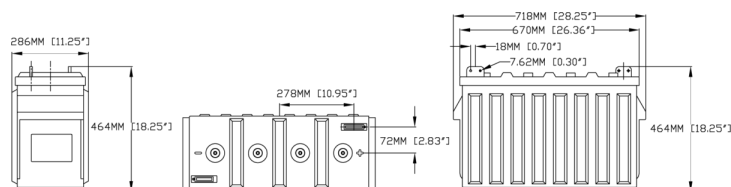

Designed in compliance with applicable BCI, DIN, BS & IEC standards.
Tested in compliance to BCI & IEC standards.



intertek
0122624