

# START Mega ASIA G78J0X0\_1 95 Ah

According to EN 50342 / JIS D 5301



## Electrical specification

|                            |             |
|----------------------------|-------------|
| Voltage:                   | 12V         |
| Capacity C <sup>20</sup> : | 95 Ah       |
| Cold cranking current:     | 730 A [EN]  |
| Cold cranking current:     | 440 A [DIN] |

## Mechanical specification

|                                        |                 |
|----------------------------------------|-----------------|
| Dimensional group:                     | D31             |
| ETN reference:                         | 595 032 073 SMF |
| DIN reference:                         | -               |
| Dimensions <sup>A</sup> in mm (LxWxH): | 304x173x220     |
| Cell Layout:                           | 0               |
| Terminal Type:                         | 1               |

## Container

|      |                  |               |
|------|------------------|---------------|
| Case | Material         | Polypropylene |
|      | Bottom hold-down | B1            |
|      | Colour           | Black         |

|     |              |               |
|-----|--------------|---------------|
| Lid | Material     | Polypropylene |
|     | Cover design | SMF           |
|     | Colour       | Black         |

|           |          |               |
|-----------|----------|---------------|
| Vent caps | Material | Polypropylene |
|           | Type     | SMF           |
|           | Colour   | Black         |

|         |          |               |
|---------|----------|---------------|
| Handles | Material | Polypropylene |
|         | Position | Top - on lid  |
|         | Colour   | Black         |


## Battery classification as per EN 50342-6

|                   |                  |                      |                 |
|-------------------|------------------|----------------------|-----------------|
| Water consumption | Charge retention | Vibration resistance | Endurance Level |
| W4                | C2               | V1                   | E1              |

## Weight<sup>B</sup>

|                             |       |
|-----------------------------|-------|
| Battery weight in kg:       | 14.40 |
| Acid weight in kg:          | 6.90  |
| Total battery weight in kg: | 21.30 |

## Layout

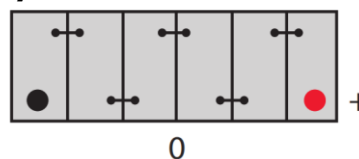

## Hold-down



## Separator

|      |    |
|------|----|
| Type | PE |
|------|----|

<sup>A.</sup> Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.  
<sup>B.</sup> Weight may vary ±5%.