

MONBAT EFB Start-Stop A289B4X0_1 75 Ah

According to EN 50342


**EFB
Start Stop**

SEALED MAINTENANCE FREE


Electrical specification

Voltage:	12V
Capacity C ²⁰ :	75 Ah
Cold cranking current:	780 A [EN]
Cold cranking current:	440 A [DIN]

Mechanical specification

Dimensional group:	LB4
ETN reference:	575 002 078
DIN reference:	57502
Dimensions ^A in mm (LxWxH)	310x175x175
Cell Layout:	0
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B14
	Colour	Black

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	Grey

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Grey

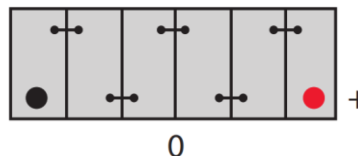


Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	Grey

Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level	Micro-cycle performance
W4	C2	V2	E2	M2

Weight^B

Battery weight in kg:	13.60
Acid weight in kg:	5.85
Total battery weight in kg:	19.45

Layout

Hold-down


^{A.} Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

^{B.} Weight may vary ±5%.