

Series	5000	Warranty	5 Years
Volts	12	Design	SPEC
Cells	6	Plates/Cell	11
Terminal Type	Flag L		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18		
Cables	19" 4/0 interconnect cables *RE incl.		

Charge

Charge Voltage Range	14.7-15 V/cell @ 25°C (77°F)
Recommended Charge Current	45 A
Maximum Charge Current	70 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

Capacity

Cold Crank Amps (CCA) 0°F / -18°C		871			
Marine Crank Amps (MCA) 32°F / 0°C		1088			
Reserve Capacity (RC @ 25A)		891 Minutes			
Reserve Capacity (RC @ 75A)		297 Minutes			
Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)	
	105%	100%	75%	50%	

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	479 AH	4.79 A
@ 72 Hour Rate	453 AH	6.29 A
@ 50 Hour Rate	429 AH	8.58 A
@ 20 Hour Rate	371 AH	18.56 A
@ 15 Hour Rate	345 AH	23.02 A
@ 10 Hour Rate	330 AH	33.04 A
@ 8 Hour Rate	319 AH	39.91 A
@ 5 Hour Rate	297 AH	59.40 A
@ 1 Hour Rate	167 AH	167.08 A

Ampere hour capacity ratings based on specific gravity of 1.280 at 27°C (80°F). Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

Specifications


Weight	123 kg	271 lbs
Length	559 mm	22"
Width	286 mm	11.25"
Height Incl. Term.	464 mm	18.25"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Electrolyte Reserve	95 mm	3.75"
Container (Inner)	Polypropylene	
Cover (Inner)	Polypropylene - heat sealed to inner container	
Container (Outer)	High Density Polypropylene	
Cover (Outer)	High Density Polypropylene snap fit to outer container	
Handles	Molded	

- Plastics are UL94 HB (UL94-V2 available)
- Plastics are impact copolymer rated to ASTM D256, D5420
- Vented design with integral flame arrestor vent caps

Cycle Life vs. Depth of Discharge

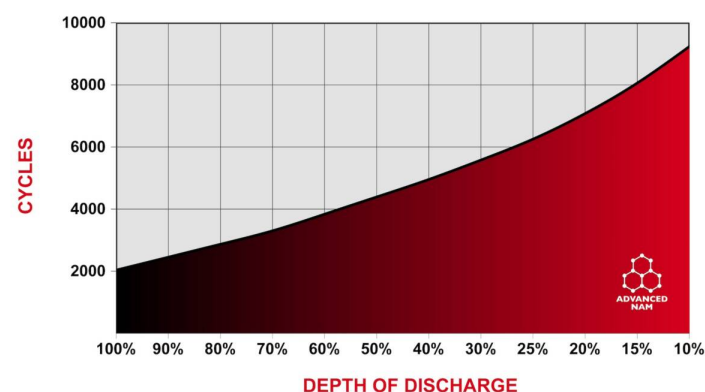

Voltage vs. Depth of Discharge

DISCHARGE	0%	25%	50%	75%	100%
20 HR AH RATE	2.10 V	2.05 V	2.02 V	1.96 V	1.75 V
6 HR AH RATE	2.10 V	2.04 V	2.00 V	1.95 V	1.75 V
1 HR AH RATE	2.10 V	2.03 V	1.99 V	1.94 V	1.75 V



Designed in compliance with applicable BCI, DIN, BS & IEC standards.
Tested in compliance to BCI & IEC standards.



intertek
0122624