



Series	AGM-S	Warranty	See Warranty Terms
Volts	12	Design	Grp 24
Cells	6		
Terminal Type	F12(M8) and TP08 Adapter [+21mm]		
Included Hardware	M8 stainless bolts & washers & TP08 adapter		
Size & Thread	M8		

Charge

Charge Voltage Range	14.7V @ 25°C (77°F)
Float Voltage Range	13.8V @ 25°C (77°F)
Recommended Charge Current	15 A
Maximum Charge Current	25 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	5.5 mΩ

Capacity

Cold Crank Amps (CCA) 0°F / -18°C	500
Marine Crank Amps (MCA) 32°F / 0°C	800
Reserve Capacity (RC @ 25A)	155 Minutes
Reserve Capacity (RC @ 75A)	34 Minutes

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	102%	100%	85%	65%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	95 AH	0.95 A
@ 20 Hour Rate	85 AH	4.25 A
@ 10 Hour Rate	77 AH	7.7 A
@ 5 Hour Rate	70 AH	14 A

Cut Off Voltage

Constant Current Discharge

	1 hr	2 hr	3 hr	5 hr	8 hr	10 hr
VPC	43.8	25.6	19.2	13.9	9.2	7.7


Specifications

Weight	23 kg	50.5 lbs
Length	260 mm	10.24"
Width	169 mm	6.65"
Height Incl. Term.	215 mm	8.46"


Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Handles	Rope / Plastic Handle
<ul style="list-style-type: none"> Plastics are UL94 HB (UL94 V0 available) Valve regulated design with integral flame arrestor Non-hazardous, Non-spillable 	

Cycle Life vs. Depth of Discharge

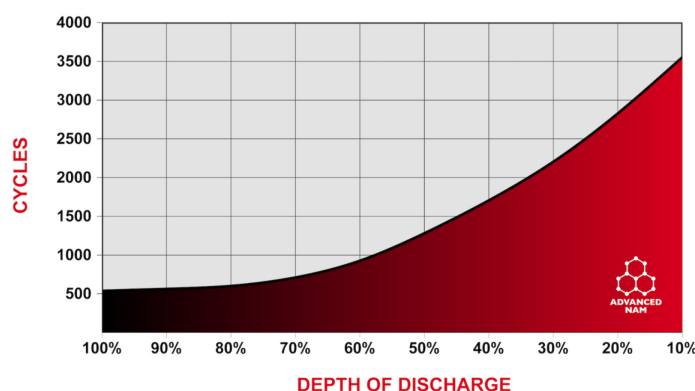

Capacity vs. Temperature

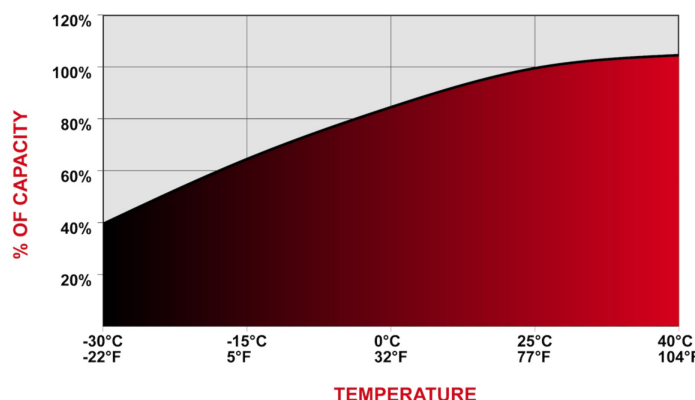

bc⁺i BATTERY COUNCIL INTERNATIONAL
Designed in compliance with applicable BCI, DIN, BS & IEC standards.
Tested in compliance to BCI & IEC standards.

