



L6

Series	GEL	Warranty	See Warranty Terms
Volts	12	Design	8D
Cells	6		
Terminal Type	L6		
Size & Thread	M8		

Charge

Charge Voltage Range	14.3V @ 25°C (77°F)
Float Voltage Range	13.7V @ 25°C (77°F)
Recommended Charge Current	50 A
Maximum Charge Current	75 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	2.7 mΩ

Capacity

Capacity Affect by Temperature		40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)		
		102%	100%	85%	65%		
Hour Rate	Capacity / AMP Hour		Current / AMPs				
@ 100 Hour Rate	290 AH		2.9 A				
@ 20 Hour Rate	260 AH		13 A				
@ 10 Hour Rate	229 AH		22.9 A				
@ 5 Hour Rate	200 AH		40.0 A				
Cut Off Voltage		Constant Current Discharge					
1.75 VPC		1 hr	2 hr	3 hr	5 hr	8 hr	10 hr
		143	85.07	66.25	44.78	30.12	25.01


Specifications

Weight	72 kg	159 lbs
Length	522 mm	20.55"
Width	269 mm	10.59"
Height Incl. Term.	248 mm	9.76"


Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Handles	Rope


Cycle Life vs. Depth of Discharge

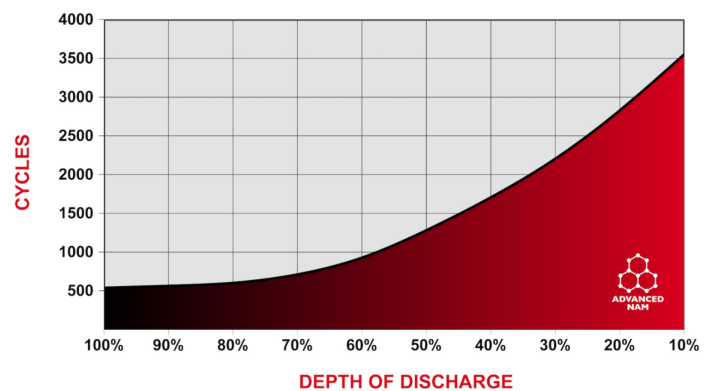

Capacity vs. Temperature

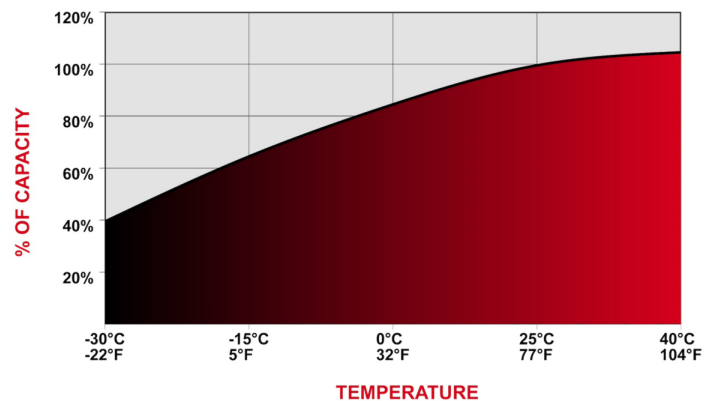

Detailed Illustration

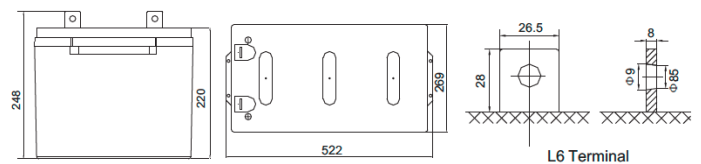

Designed in compliance with applicable BCI, DIN, BS & IEC standards.
Tested in compliance to BCI & IEC standards.

